**SMALL DIAMOND MESH LATH:**

Small diamond mesh lath is produced from prime quality G60 galvanized steel and is primarily used for interior and exterior plaster applications. Expanded uniformly to offer small openings which conserve plaster and provide better bond. It is easily cut and shaped for curved surfaces and ornamental designs.

WEIGHT: 2.5 lbs/sq. yd & 3.4 lbs/sq yd.

SIZE: 27" x 96" (2 sq. yds.)

PACKAGING: 10 pieces per bundle (20 sq. yds.)
50 bundles per pallet

SPECIFICATIONS: A.S.T.M. C-847 & Federal
Specifications QQ-L-101 C

Small Diamond Mesh Lath is also available with asphalt paper backing.

SELF-FURRING LATH

Self-furring lath is produced from prime quality G-60 galvanized steel and is available in two styles: dimple and v-groove for use in exterior stucco applications, interior masonry walls or in fireproofing steel columns. Self-furring dimples are uniformly staggered indentations designed to hold the lath approximately 1/4" away from the surface to be plastered. V-grooved lath runs horizontally every 6 inches providing a self-furring offset.



WEIGHT: 2.5 lbs/sq. yd & 3.4 lbs/sq yd.

SIZE: 27" x 96" (2 sq. yds.)

PACKAGING: 10 pieces per bundle (20 sq. yds.)
Dimpled - 25 bundles per pallet
V-Groove - 50 bundles per pallet

SPECIFICATIONS: A.S.T.M. C-847 & Federal
Specifications QQ-L-101 C

Self-Furring Lath is also available with asphalt paper backing.

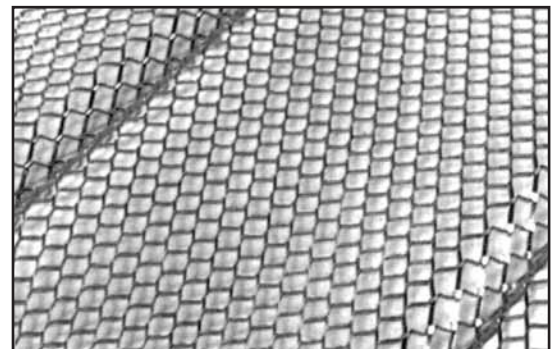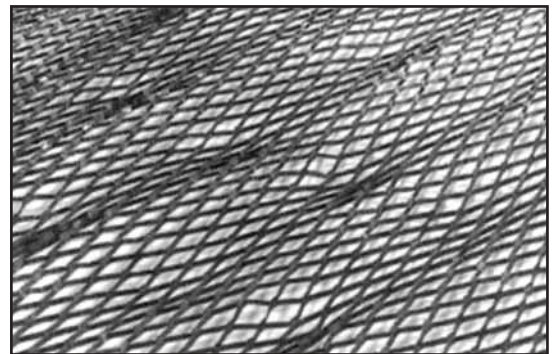

3/8" HIGH RIB LATH:

High rib lath is produced from prime quality G60 galvanized steel and is primarily used in horizontal applications such as ceilings and soffits. It provides seven longitudinal ribs 3/8" deep and eight small inverted ribs, together with a small herringbone mesh offering superior strength and spanning capabilities.

WEIGHT:	3.4 lbs/sq. yd
SIZE:	27" x 96" (2 sq. yds.)
PACKAGING:	10 pieces per bundle 50 bundles per pallet
SPECIFICATIONS:	A.S.T.M. C-847 & Federal Specifications QQ-L-101 C



TI-LATH:

Ti-lath is designed for use primarily where a water resistant backing is required to minimize or prevent wall leaks. It is for use behind ceramic tile installations, behind Portland cement plaster in interior wet areas, and for exterior stucco and overcoating applications. Ti-lath is metal lath fully backed with asphalt impregnated paper which remains water resistant, yet permeable. Ti-lath is available in small diamond mesh, dimple, and v-groove in 2.5 and 3.4.

PACKAGING:	10 pieces per bundle 25 bundles per pallet
SPECIFICATIONS:	Federal Specification UU-B-790a, Style 2, Grade D

metal lath accessories also available