

Product Application

FTB fire track blocking provides horizontal bracing for studs and joists. Fire track blocking is thoroughly engineered for 12", 16", and 24" stud layouts with a precut flange to fit the stud cavity for quick installation.



Features and Benefits

- Available in 12", 16", and 24" stud spacing
- Pre-punched guide holes
- One-piece assembly
- Fills the whole stud cavity

Material Composition

- Mill certified steel
- ASTM A653/A653M
- 54 mil
 - 57 ksi yield strength
 - 65 ksi tensile strength
 - G60 galvanized coating

Nomenclature Example:

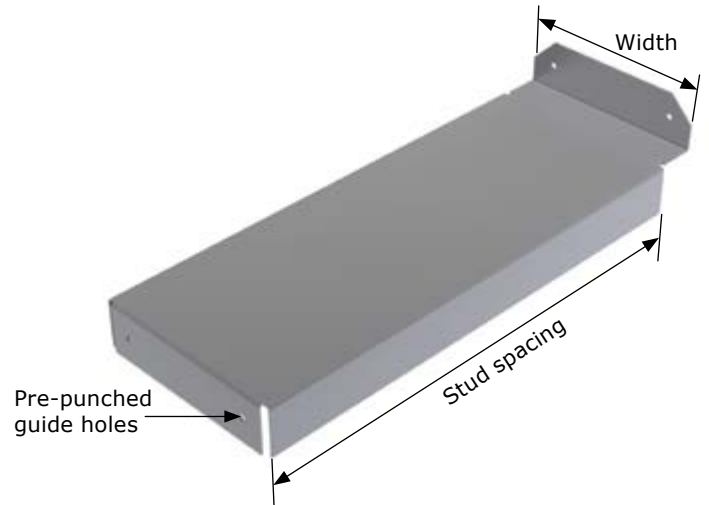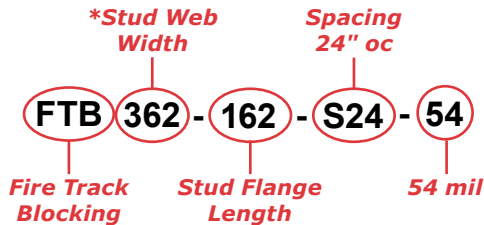

Quantity / Order Information

Part No.	Stud Dimensions		
	Width	* Flange	Spacing
FTB250-*-S12-54	2 ½"	125/162/200	12"
FTB250-*-S16-54	2 ½"	125/162/200	16"
FTB250-*-S24-54	2 ½"	125/162/200	24"
FTB350-*-S12-54	3 ½"	125/162/200	12"
FTB350-*-S16-54	3 ½"	125/162/200	16"
FTB350-*-S24-54	3 ½"	125/162/200	24"
FTB362-*-S12-54	3 ⅝"	125/162/200	12"
FTB362-*-S16-54	3 ⅝"	125/162/200	16"
FTB362-*-S24-54	3 ⅝"	125/162/200	24"
FTB400-*-S12-54	4"	125/162/200	12"
FTB400-*-S16-54	4"	125/162/200	16"
FTB400-*-S24-54	4"	125/162/200	24"

Part No.	Stud Dimensions		
	Width	* Flange	Spacing
FTB600-*-S12-54	6"	125/162/200	12"
FTB600-*-S16-54	6"	125/162/200	16"
FTB600-*-S24-54	6"	125/162/200	24"
FTB800-*-S12-54	8"	125/162/200	12"
FTB800-*-S16-54	8"	125/162/200	16"
FTB800-*-S24-54	8"	125/162/200	24"
FTB1000-*-S12-54	10"	125/162/200	12"
FTB1000-*-S16-54	10"	125/162/200	16"
FTB1000-*-S24-54	10"	125/162/200	24"
FTB1200-*-S12-54	12"	125/162/200	12"
FTB1200-*-S16-54	12"	125/162/200	16"
FTB1200-*-S24-54	12"	125/162/200	24"